

## PRODUCT IN PLACE

Entry-Pro provides a modular interlocking configuration that comes in multiples of 2 feet increments in length and width. Entry-Pro can be made to any width or length specifications to conform to any area. Individual quads will be customized in size to meet overall dimensions. Quads are held in place from underneath with mat retainers.

Entry-Pro can be surface mounted or recessed into the floor with optional frame. The mat is approximately .250" high and is surrounded by anodized aluminum ramps (where surface mounted) and dividers (where recessed). For recessed applications, well should be .25" deep. In all cases, the mounting surface should be a hard, smooth surface. Please call for CAD details.

## MATERIALS AND FINISHES

Entry-Pro consists of flexible, injection-molded, 100% virgin PVC quads that can be surrounded by optional .75" x .25" anodized aluminum frames and 2" x .25" anodized aluminum ramps. Each mat is custom-engineered to fit the application. Standard colors include Midnight Blue, Forest Green, Charcoal Grey, Brick Red and Black. Custom color options for vinyl quads, dividers and ramps are also available upon request. We can also bend dividers and ramps to a specified radius.



## TECHNICAL SUPPORT

### Test Results - Properties and Standards

Please call our Customer Service Department for additional information.


VINYL PROPERTIES	
Thickness	.250"
Hardness, Shore 'A', Instant ASTM D 2240	84
Specific Gravity, ASTM D 792	1.35
Tensile Strength, ASTM D 412	2790 psi
Elongation % at Break, ASTM D 412	375%
100% Modulus, ASTM 412	1572 psi
Tear Strength, ASTM D 624	384 ppi
Low Temperature Brittleness, ASTM D 1043	-35° C
Static Coefficient of Friction, ASTM D 2047	Dry Leather = .79 Wet Leather = 1.04 Values greater than .5 are considered slip-resistant

### Aluminum Profiles Include

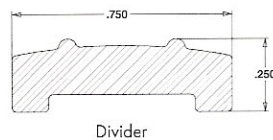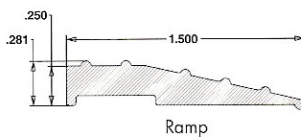

### Entry-Pro Mat Retainer

- Allows for easy removal of Entry-Pro for cleaning purposes
- Entry-Pro snap-fits easily back into place
- Helps keep the mat from moving under heavy traffic

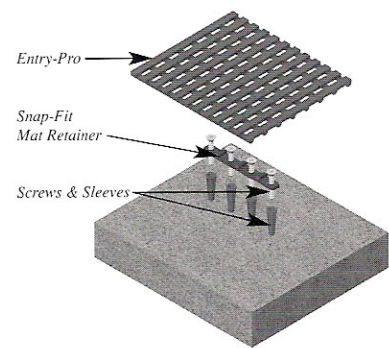

SPACE-LINKS products are covered by one or more of the following patent and patent-pending numbers: 4,796,399 / 5,882,764 / 5,958,538 / 5,992,105 / 6,042,915 / 6,068,908 / 6,127,015 / 6,319,584 B1 / 6,352,757 B1 / 6,405,495 B1 / 6,440,525 B1 / 6,444,284 B1. Other domestic and international patents pending.